




Flanged AVK Ball Check Valve with standard ball




Threaded AVK Ball Check Valve with standard ball

AVK Ball Check Valve DN500

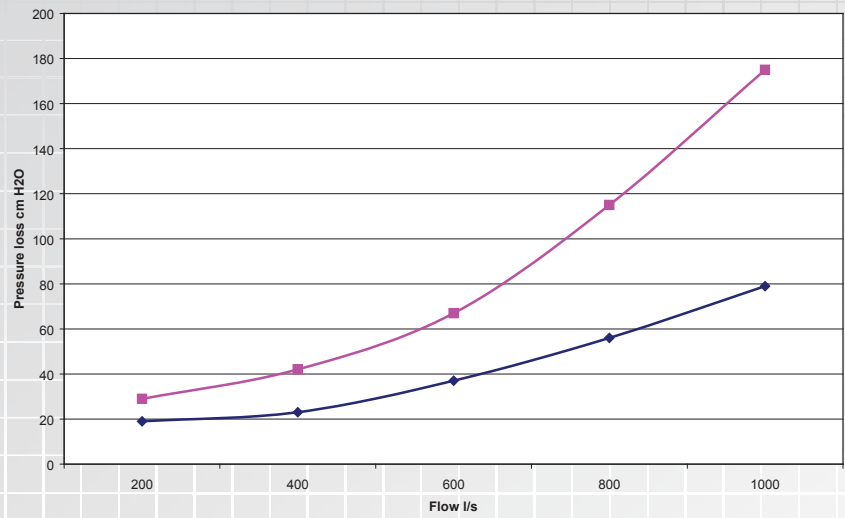

AVK Ball Check Valve DN600

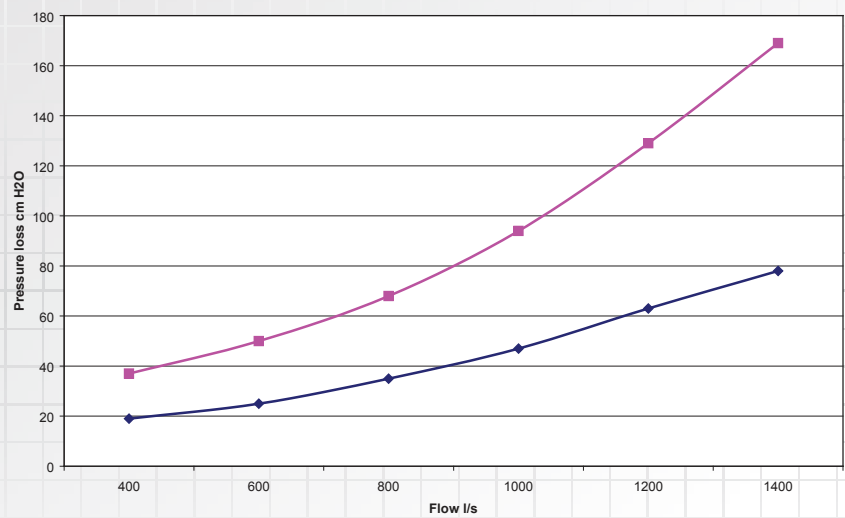

Required opening pressure - AVK ball check valve. For vertically installed ball check valve in an empty pipe system.

DIMENSION	PN	DIMENSION	PN
mm	bar	mm	bar
DN 32	0,007	DN 200	0,03
DN 40	0,016	DN 250	0,035
DN 50	0,012	DN 300	0,042
DN 65	0,019	DN 350	0,05
DN 80	0,012	DN 400	0,057
DN 100	0,016	DN 500	0,363
DN 125	0,032	DN 600	0,424
DN 150	0,022		

In horizontal position no pressure is needed but a minimum fluid velocity of 1 to 1.5 m/s.