


WSBU S.S. Flexible Connector with Male Screw End

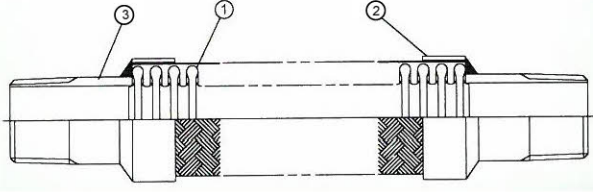

Construction

Item	Parts	Material	Options
1	Bellows	SUS304	SUS316
2	Wire Braids	SUS304	
3	Tube End	SUS304	SUS316

* Stainless Steel Tube End, screw end to PT or NPT

* Different length even up to 6 meters available on request

* It is important not to introduce torque to SS flexible connector

Specification

Model	Nominal Bore		Total Length mm	Bellows O.D.	Lateral Movement (mm)	Working Pressure kg/cm ²
	mm	inch				
WSBU	15	1/2	250	30.5	20	16
WSBU	20	3/4	250	30.5	20	16
WSBU	25	1	250	38.0	20	16
WSBU	32	1 1/4	250	46.0	18	16
WSBU	40	1 1/2	300	56.0	16	16
WSBU	50	2	300	70.0	15	16

WATERFRONT FLUID CONTROLS LTD

www.waterfrontc.co.uk

The Hub (Unit8), Digital Media Quarter, Pacific Drive, Glasgow, G51 IEA

TEL: +44 (0)141 427 7266 * FAX: +44 (0)141 427 2706 ** EMAIL: SALES@WATERFRONTC.CO.UK